

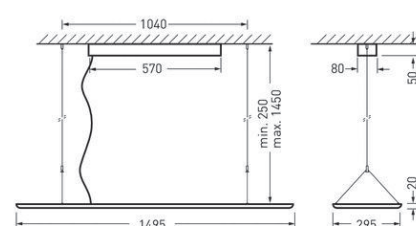


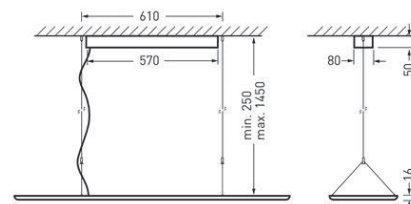

## 2360 LED Basic

Armatyr for pendelmontasje med opp/nedlys og med UGR <19. Egnet for møterom, kontorer og utdanningsinstitusjoner.



## Utvalgte varianter

Produktnavn	Best. nr.	Lumen	Watt	Kelvin	Dimensjoner (mm)	Erstatning for
<b>Av/På:</b>						
2360 H1 PW19-IL 4000-830 ET	TL7377540	4400	40	3000	1195x295x16	1x54/2x28W
2360 H1 PW19-IL 4000-840 ET	TL7377640	4400	40	4000	1195x295x16	1x54/2x28W
2360 H2 PW19-IL 6000-830 ET	TL7789940	6000	55	3000	1495x295x20	2x35W
2360 H2 PW19-IL 6000-840 ET	TL7790040	6000	55	4000	1495x295x20	2x35W
<b>DALI:</b>						
2360 H1 PW19-IL 4000-830 ETDD	TL7377551	4400	40	3000	1195x295x16	1x54/2x28W
2360 H1 PW19-IL 4000-840 ETDD	TL7377651	4400	40	4000	1195x295x16	1x54/2x28W
2360 H2 PW19-IL 6000-830 ETDD	TL7789951	6000	55	3000	1495x295x20	2x35W
2360 H2 PW19-IL 6000-840 ETDD	TL7790051	6000	55	4000	1495x295x20	2x35W

## Nøkkeldata

Teknisk data	
System Effekt (W)	40/55
Spenning (V)	230-240
Materiale	Aluminium
Nettvekt (kg)	5,3-6,0
IP-grad	IP20
System Lumen (lm)	4400/6000
Fargetemperatur (K)	3000/4000
Fargegjengivelse (CRI)	80
MacAdam - SDCM	<3
Blendingstall (UGR)	<19
Levetid	50.000t-L70
lm/W	109-110