

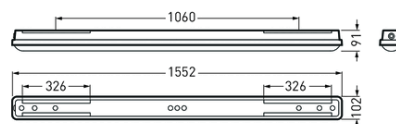


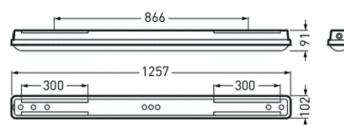

# OLEVEON F Pro

Armatør som både tåler støv og kraftig vannsprut. Egnert for bruk i HACCP, IFS og/eller BRC Global Standard Food sertifiserte selskaper.



## Utvalgte varianter

Produktnavn	Best. nr.	Lumen	Watt	Kelvin	Dimensjoner (mm)
<b>Av/På:</b>					
OleveonF 12 B 2300-840 ET PC	TL7116640	2600	19	4000	1257x102x91
OleveonF 15 B 4000-840 ET PC	TL7121840	3900	28	4000	1552x102x91
OleveonF 12 B 4000-840 ET PC	TL7118240	3900	28	4000	1257x102x91
OleveonF 15 B 8000-840 ET PC	TL7128640	7700	57	4000	1552x102x91
<b>DALI:</b>					
OleveonF 12 B 2300-840 ETDD PC	TL7116651	2600	19	4000	1257x102x91
OleveonF 15 B 4000-840 ETDD PC	TL7121851	3900	28	4000	1552x102x91
OleveonF 12 B 4000-840 ETDD PC	TL7118251	3900	28	4000	1257x102x91
OleveonF 15 B 8000-840 ETDD PC	TL7128651	7700	57	4000	1552x102x91
<b>Av/På gjennomgangskobling:</b>					
OleveonF 15 B 6000-840 ET PC+LV	TL10241747	7700	57	4000	1552x102x91
<b>DALI og gjennomgangskobling:</b>					
OleveonF 12 B 4000-840 ETDD PC + LV	TL7118451	3900	28	4000	1257x102x91
OleveonF 15 B 6000-840 ETDD PC + LV	TL7125251	6000	44	4000	1552x102x91
OleveonF 15 B 8000-840 ETDD PC LV	TL50249651	7700	57	4000	1552x102x91

## Nøkkeldata

Teknisk data	
System Effekt (W)	19-57
Spennning (V)	230-240
Materiale	Polykarbonat
Nettovekt (kg)	2,4-2,5
IP-grad	IP66
System Lumen (lm)	2600-7700
Fargetemperatur (K)	4000
Fargegjengivelse (CRI)	80
MacAdam - SDCM	<3
Levetid	50.000t-L80
lm/W	135-137