

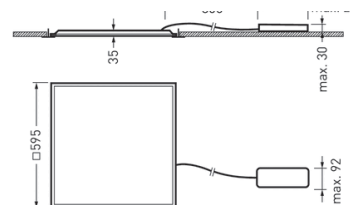




VALINEO Pro TW

Energieffektiv ledplate for T-profiler i eks. kontorer, skoler, sykehus og handel. Lysfluks justerbart i 4 trinn på driveren med dip switch (gjelder ikke kelvin change, HCL).

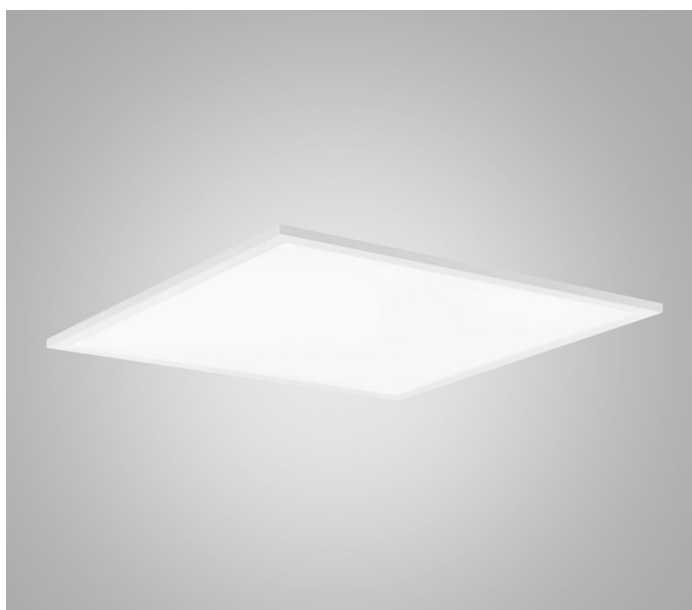

Utvalgte varianter

Produktnavn	Best. nr.	Lumen	Watt	Kelvin	Dimensjoner (mm)
Av/På:					
ValineoG4 M73 PW19 38-50/4ML-830 ET X2	TL8423140	3500-4600	26-38	3000	595x595x35
DALI:					
ValineoG4 M73 PW19 38-50/4ML-830 ETDD	TL8423151	3500-4600	26-38	3000	595x595x35
ValineoG4 Act M73 PW19 42-8 ETDD8	TL8423862	4200	32-33	2700-6000	595x595x35

Nøkkeldata

Teknisk data	
System Effekt (W)	26-38
Spenning (V)	220-240
Materiale	Ramme i aluminium og bakplate i blikk
IP-grad	IP44
System Lumen (lm)	Se tabell
Fargetemperatur (K)	Se tabell
Fargegjengivelse (CRI)	80
MacAdam - SDCM	<3
Levetid	100.000t-L70
lm/W	121-135